XUAIVQI

选择安全 选择旋奇

Choose safety Choose XUANQI

产品选型手册

PRODUCT SELECTION MANUAL

XUAIVQI

乐清市旋奇电器有限公司

手机：18968713700

邮箱：sales@xuanqile.com

网址：www.xuanqile.com



乐清市旋奇电器有限公司

YUEQING XUANQI ELECTRICAL CO.,LTD


56P313 56P315

SINGLE PHASE PLUG–3 PIN FLAT

Description: Single phase 3 flat pin plug.IP66 rated. Available in 10,13A & 15A.

Voltage:250V

Code: 56P310/56P313/56P315


56PA420 56PA440

THREE PHASE 4 ROUND PIN ANGLED PLUGS

Description: Three phase 4 round pin angled plugs.IP66 rated. Available in 10,20,32,40,&50A.

Voltage:500V

Code:56PA410/56PA420/56PA432/56PA440/56PA450


56P332

THREE PHASE 3 ROUND PIN STRAIGHT PLUG

Description: Three phase 3 round pin straight plug.IP66 rated. Available in 10,20,32A.

Voltage:250V/500V

Code: 56P310R/56P320R/56P332


56PA450 56PA510

THREE PHASE 5 ROUND PIN ANGLED PLUGS

Description: Three phase 5 round pin angled plugs.IP66 rated. Available in 10,20,32,40 & 50A.

Voltage:500V

Code:56PA510/56PA520/56PA532/56PA540/56PA550


56P410 56P420

THREE PHASE 4 ROUND PIN STRAIGHT PLUG

Description: Three phase 4 round pin straight plug.IP66 rated. Available in 10,20,32,40&50A.

Voltage:500V

Code: 56P410/56P420/56P432/56P440/56P450


56CSC310 56CSC332

THREE PHASE 3 ROUND PIN EXTENSION SOCKET

Description: Three phase 3 round pin cord extension socket. IP66 rated. Available in 10,20,32A.

3 pin voltage:250V/500V

Code: 56CSC310/56CSC320/56CSC332


56P520 56P540

ONE & TWO MODULE ENCLOSURE COVER

Description: Three phase 4 & 5 round pin straight plug.IP66 rated. Available in 10,20,32,40&50A.

Voltage:500V

Code: 56P510/56P520/56P532/56P540/56P550


56CSC440 56CSC450

THREE PHASE 4 ROUND PIN EXTENSION SOCKET

Description: Three phase 4 round pin cord extension socket. IP66 rated. Available in 10,20,32,40 & 50A.

Voltage:500V

Code: 56CSC410/56CSC420/56CSC432/ 56CSC440/56CSC450


56PA332

THREE PHASE 3 & 4 ROUND PIN ANGLED PLUGS

Description: Three phase 3 & 4 round pin angled plugs.IP66 rated. available in 10,20,32A.

Voltage:250V/500V

Code:56PA310R/56PA320R/56PA332


56CSC510 56CSC520

THREE PHASE 5 ROUND PIN EXTENSION SOCKET

Description: Three phase 5 round pin cord extension socket. IP66 rated. Available in 10,20,32,40 & 50A.

Voltage:500V

Code: 56CSC510/56CSC520/56CSC532/56CSC540/56CSC550

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI


56S0313 56S0315

SINGLE PHASE 3 FLAT PIN SOCKET

Description: Single phase 3 flat pin socket.IP66 rated. Available in standard grey or orange10,13 & 15A.

Voltage:250V

Code:56S0310/56S313/56S0315


56CV320 56CV332

THREE PHASE 3 ROUND PIN COMBO SWITCH & SOCKET

Description: Three phase 3 round pin,250V & 500V 50HZ switched socket
IP66 rated. Available in standard grey or ornge 10,20,32A.

Voltage:250V/500V

Code:56CV310R/56CV320R/56CV332


56S0320 56S0332

THREE PHASE 3 ROUND PIN SOCKET

Description: Three phase 3 round pin socket. IP66 rated.
Available in standard grey 20,32A.

Voltage:250V/500V

Code: 56SO320R/56SO332


56CV420 56CV432

THREE PHASE 4 ROUND PIN COMBO SWITCH & SOCKET

Description: Three phase 4 round pin,500V 50HZ switched socket IP66 rated. Available in standard grey or orange 10,20,32,40A & 50A.

Voltage:500V

Code:56CV410/56CV420/56CV432/56CV440/56CV450


56S0420 56S0432

THREE PHASE 3 ROUND PIN SOCKET

Cription: Three phase 4 round pin socket. IP66 rated. Available in standard grey or orange 10,20, 32,40 & 50A.

Voltage:500V

Code: 56SO410/56SO420/56SO432/56SO440/ 56SO450


56CV510 56CV520

THREE PHASE 5 ROUND PIN COMBO SWITCH & SOCKET

Description: Three phase 5 round pin,500V 50HZ switched socket IP66 rated. Available in standard grey or orange 10,20,32,40A & 50A.

Voltage:500V

Code:56CV510/56CV520/56CV532/56CV540/56CV550


56S0510 56S0520

ONE & TWO MODULE ENCLOSURE COVER

Description: Three phase 5 round pin socket. IP66 rated. Available in standard grey or orange 10,20,32, 40 & 50A.

Voltage:500V

Code: 56S0510/56S0520/56SO532/56SO540/ 56SO550


56SW332

THREE PHASE SQUARE SWITCH

Description: Three phase 3 square switch. IP66 rated. Available in standard grey or orange 10 & 20A.3phase switch is also available in 32,40,50 & 63A

Voltage:500V

Code: 56SW210/56SW220/56SW310/56SW320/56SW332/ 56SW340/56SW350/56SW363


56CV313 56CV315

SING PHASE 3 FLAT PIN COMBO SWITCH & SOCKET

Description: Single phase 3 flat pin,240V 50HZ double pole switched socket.
IP66 rated. Available in standard grey 10A ,13A & 15A

Voltage:250V

Code: 56CV310/56CV313/56CV315


56AI310 56AI410 56AI510

THREE PHASE 3&4&5 ROUND PIN STRAIGHT PLUG

Description: Three phase3, 4 & 5 round pin straight plug.IP66 rated.
Available in 10,20,32,40 & 50A.

Voltage:500V

Code: 56AI310/56AI320/56AI332/56AI410/ 56AI420/56AI432/56AI440/56AI450/56AI510/ 56AI520/56AI532/56AI540/56AI550



56/32

开关 Switch
10A-250~
IP56



56UKC313

开关插座 Switch Socket
13A-250V~
IP55



56AI310/56AI315

10/15A-250V~
IP66



56/32LE

开关 Switch
10A-250~
IP56



THREE RHASE SQUARE CHANGEOVER SWOTCH

Description: Three phase 3 pole 20A & 32A square changeover or forward reverse switch. IP66 rated. Available in standard grey and resistive orange.

Code: 56SW320C/0 56SW332C/0



THREE RHASE SQUARE CHANGEOVER SWOTCH

Description: Three phase 3 pole 40A & 63A square changeover or forward reverse switch. IP66 rated. Available in standard grey and resistive orange.

Code: 56SW363C/0



THREE RHASE 5 QUADRATE PIN SOCKET(OUTLET)

Description: Three phase 5 quadrate pin socket.
IP44 rated. Available in standard grey 32A.

Code: 3P+N+E ES532



THREE RHASE 5 QUADRATE PIN SOCKET(OUTLET)

Description: Three phase 4 quadrate pin socket.
IP44 rated. Available in standard grey 20A.

Code: 3P+E ES420



THREE RHASE 5 QUADRATE PIN SOCKET(OUTLET)

Description: Three phase 5 quadrate pin socket.
IP44 rated. Available in standard grey 20A.

Code: 3P+N+E ES520



THREE RHASE 4 QUADRATE PIN SOCKET(OUTLET)

Description: Three phase 4 quadrate pin socket.
IP44 rated. Available in standard grey 32A.

Code: 3P+E ES432

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI



THREE PHASE 4 ROUND PIN STRAIGHT PLUG

Description: Three phase 4 415V round pin straight plug.
IP44 rated. Available in 32A.

Code: 3P+E P432



THREE PHASE 5 ROUND PIN STRAIGHT PLUG

Description: Three phase 5 415V round pin straight plug.
IP44 rated. Available in 32A.

Code: 3P+N+E P532



SINGLE PHASE 2 ROUND PIN EXTENSION SOCKET

Description: Three phase 250V round pin cord extension socket.
IP44 rated. Available in 16A.

Code:ES216



THREE PHASE 4 ROUND PIN EXTENSION SOCKET

Description: Three phase 4 round pin cord extension socket.
IP44 rated. Available in 20A.

Code: 3P+E ES420



SINGLE PHASE 2 ROUND PIN EXTENSION SOCKET

Description: Three phase 5 round pin cord extension socket.
IP44 rated. Available in 20A.

Code: 3P+N+E ES520



ONE & TWO MODULE ENCLOSURE COVER

Description: One & two module enclosure cove.
Ip66 rated.
Available in resistive orange and resistive

Code: 56L1/56L2/56L3/56L4



ONE & TWO MODULE ENCLOSURE COVER

Description: One & two module enclosure cove.
Ip66 rated.
Available in standard grey and resistive orange.

Code: 56E1/56E2/56E3/56E4/56E6/56E8/56E9/
56ES1/56ES2



ONE & TWO MODULE ENCLOSURE COVER

Description: One & two module enclosure cove.
Ip66 rated.
Available in standard grey and resistive orange.

Code: 56CB4N/56CB8N



WATHERPROOF BOX

Description: Weatherproof enclosure with clear lid and locking provision IP54 rated product.

Code: WP/CBOX



DMC BOX

Description: DMC weatherproof wall mounting enclosure. UV, corrsionand scratch resistant, IP65 rated.

310x240x150 420x315x160
520x450x210 650x510x250
800x600x250 1000x800x250

STRUCTURE OF PLUG & SOCKET

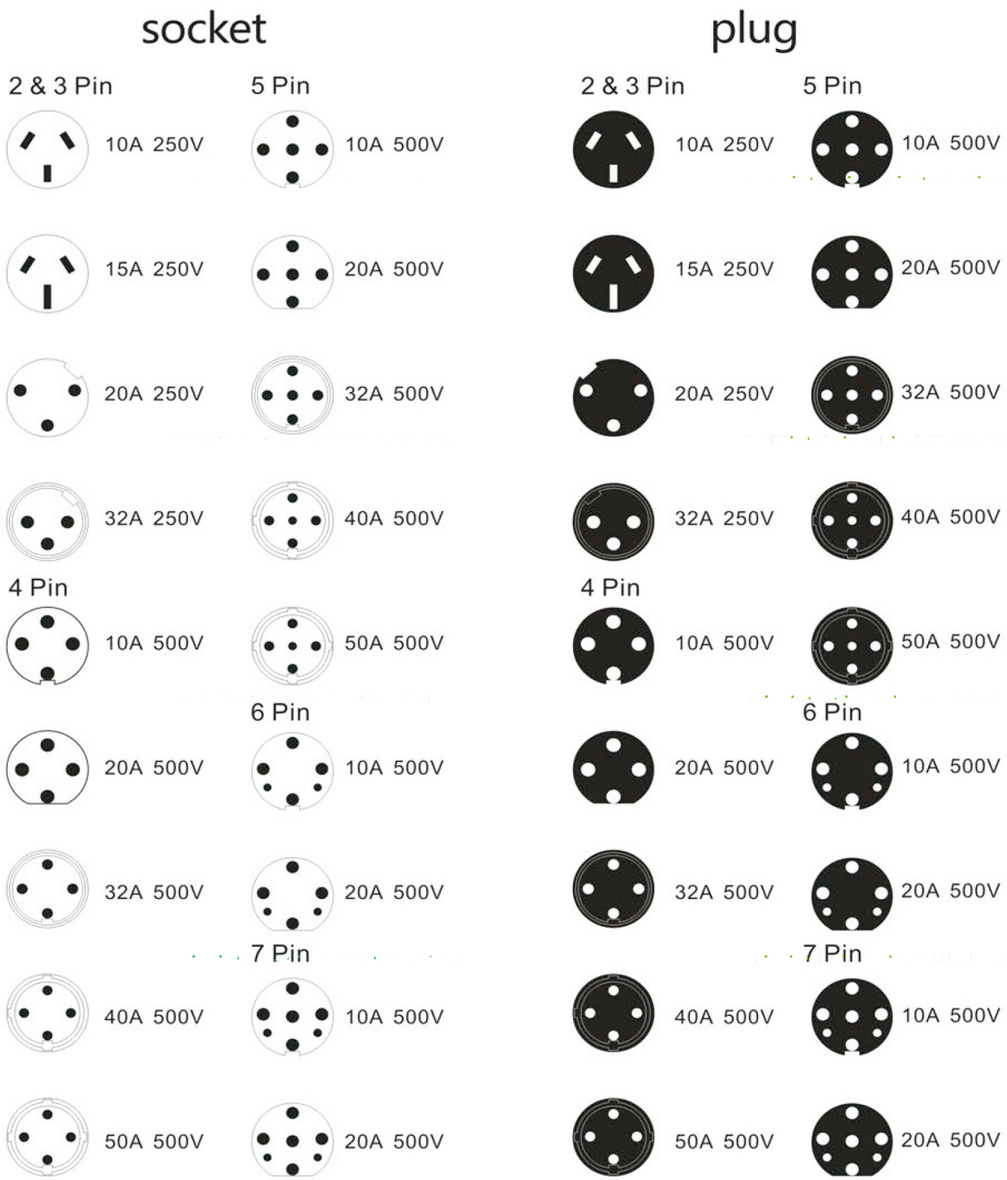

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI

特征 Features

UKF系列耐气候隔离开关应用范围广泛，适用于任何户外应用条件。包括单极、双极以及三极开关，电流使用范围 20A~63A。底座安装装置提供了更容易的端接和更大的接线空间。(开关尺寸为165mm× 82mm, 总高85mm。)
安装接地和中性连接杆带双重夹紧螺钉 ,相同的电缆剥线长度并可靠夹紧。终端孔径5-6mm。
安全性更高，安装开关到金属结构设有一个绝缘帽，绝缘帽罩住底座安装螺钉，防止其接触到带电电缆。

T

switches suitable for virtually any external application.
Included in the range are single, double and triple pole switches from 20 to 63 Amps. The base mounted mechanism provides for easier termination and more wiring room. Switch dimensions are 165mm x 82mm with an overall height of 85mm.
Fixed Earth and Neutral connector bars with dual clamping screws per tunnel provide equal stripping lengths and secure clamping for all cables. Terminal bore size 5 - 6mm.
A safety feature for mounting switches to metal structures is the insulating caps that cover base mounting screws to totally protect them from any live cables.

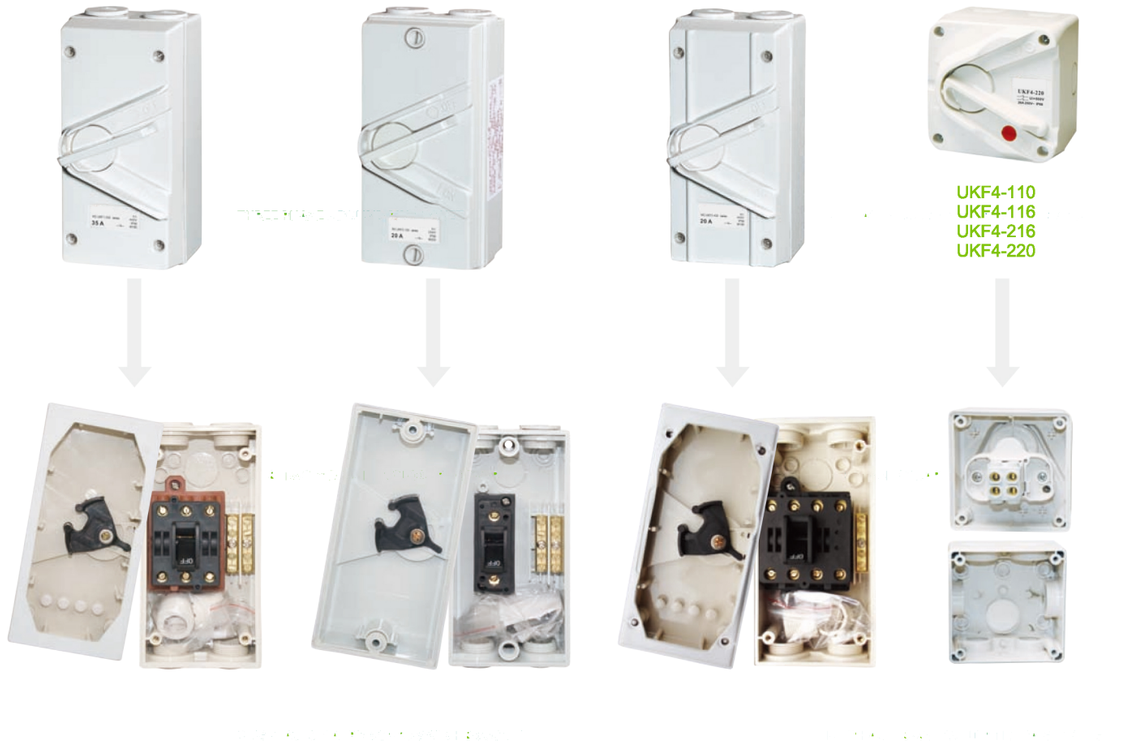

每只装置提供螺纹管接头和螺纹异径接头，以便与 25mm或20mm的管道以及螺帽连接。螺帽必须符合IP等级。
耐冲击底座和盖在几乎所有安装条件下可以承受猛烈的碰撞。此两部分由一耐气候密封垫片密封。
关于安全性，提供一个 7mm直径的孔，用于将操作杆锁定在 OFF位置。深度安装的隔板能确保操作杆防止意外操作。
所有装置符合IEC60947-3。
标准颜色为灰色和白色。

Each unit supplied with screwed conduit plugs and screwed reducers for easy connection to 25mm or 20mm conduits and screw caps .Screw caps must be installed to ensure IP Rating.
The impact Resistant base and cover will survive the hardest knocks in almost any installation. The two sections are sealed with aone piece weather seal gasket.
For security, a 7mm diameter hole is provided for padlocking the lever in the OFF position. Deep moulsed barriers protect the operating lever from physical abuse or accidental switching.
All units comply to IEC60947-3.
Standard colours are Grey & White.

UKP0/L1



表面安装
总开关、维修开关
UKP0
10, 16, 20A
Surface installation
Main switch and maintenance
switch UKP0
10, 16, 20A

UKP1/L2



表面安装
总开关、维修开关
UKP1
20, 25, 32A
Surface installation
Main switch and maintenance
switch UKP1
20, 25, 32A

UKP3/L3



表面安装
总开关、维修开关
UKP3
32, 40, 50, 63A
Surface installation
Main switch and maintenance
switch UKP3
32, 40, 50, 63A

UKP5/L5



表面安装
总开关、维修开关
UKP5
63, 80, 100A
Surface installation
Main switch and maintenance
switch UKP5
63, 80, 100A

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD

UKT0/L1



表面安装
转换UKT0
10, 16, 20A
Surface installation
Transfer UKT0
10, 16, 20A

UKT3/L3



表面安装
转换UKT3
20, 32, 40A
Surface installation
Transfer UKT3
20, 32, 40A

UKT5/L5



表面安装
转换UKT5
63, 80, 100A
Surface installation
Transfer UKT5
63, 80,100A

UKP5/E



后部安装
通断开关UKP5
63, 80,100A
Rear installation
On-off switch UKP5
63, 80, 100A

PLASTIC SCREW

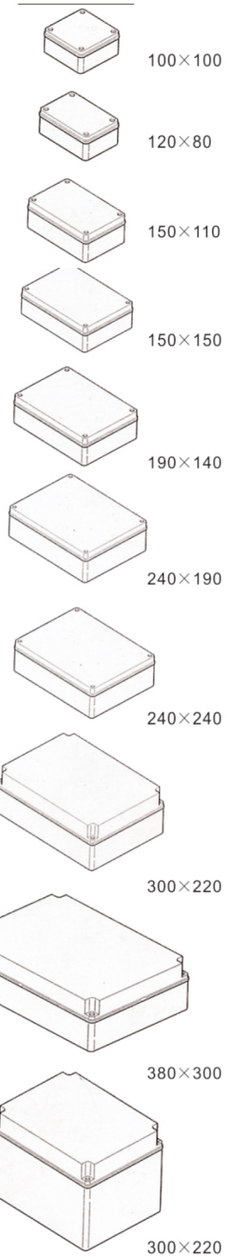

SURFACE MOUNTING JUNCTION BOXES

Reference Standard:IEC 60670

-Made of self-extinguishing engineering plastic
-RAL 7035 grey
-Max. operating tempertures: -25℃+85℃
-Full insulation to EN 60439-1

Box With Cable Sleeves- IP56
-With screw-down cover

INTERNAL DIMENSIONS (A×B×h)mm	FASTENING SCREWS
100×100×50	4
120×80×50	4
150×110×70 (•) ▲	4
150×150×70 (•) ▲	4
150×150×80 (•) ▲	4
190×140×70 (•) ▲	4
240×240×80 (•) ▲	4
240×190×90 (•) ▲	4
300×200×120 (•) ▲	4
380×300×120 (•) ▲	4
460×380×130 (•) ▲	6

(•) Optional wall mounting brackets
▲ Suitable for hinges mounting

Higher Box With Cable Sleeves- IP56
-Screw-down cover

INTERNAL DIMENSIONS (A×B×h)mm	FASTENING SCREWS	PACK QTY
100×100×80	4	1/24
240×190×125	4	1/6
300×220×170	4	1/6
380×300×170 (•) ▲	4	1/3
460×380×130 (•) ▲	6	1

(•) Optional wall mounting brackets
▲ Suitable for hinges mounting

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI

PLASTIC SCREW

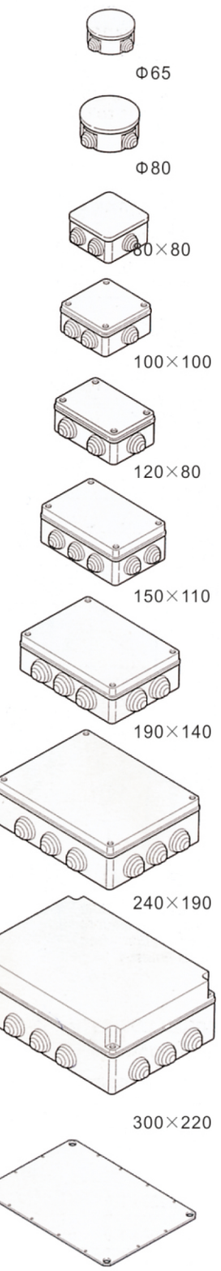

SURFACE MOUNTING JUNCTION BOXES

IP44 Series

Box With Cable Sleeves -With press-fit cover

INTERNAL DIMENSIONS (A×B×h)mm	NO. OF INLETS FOR	FASTENING SCREWS
Φ65×35	4 Φ23mm PG 16	2
Φ80×40	4 Φ23mm PG 16	2
Φ80×80×40	6 Φ23mm PG 16	2

IP56 Series

Box With Cable Sleeves -With screw-down cover

INTERNAL DIMENSIONS ENSIONS (A×B×h)mm	NO. OF INLETSFOR	FASTENING SCREWS
100×100×50	6 Φ29mm PG 21	4
120×80×50	6 Φ29mm PG 21	4
150×110×70	10 Φ29mm PG 21(•)▲	4
190×140×70	10 Φ38mm PG 16(•)▲	4
240×190×90	12 Φ38mm PG 16(•)▲	4
300×200×120	12 Φ38mm PG 16(•)▲	4
380×300×120	12 Φ48mm PG 16(•)▲	4
460×380×130	14 Φ48mm PG 16(•)▲	6

(•) Optional wall mounting brackets
▲ Suitable for hinges mounting

Accessories

	BOX (mm)	DIMENSIONS (A B)mm	FASTENING SCREWS
Mounting plate	194 140	176×126×1,5	4
	240 190	226×176×1,5	4
	300 220	284×173×1,5	4
	380 300	358×252×1,5	4
	460 380		
12 Sealing caps	For providing full insulation according to EN 60439-1		
Sealing kit Hinges kit (3 pieces)	100×100-120×80-150×110		
	190×140-240×190-300×220-380×300		



WATERPROOF DISTRIBUTION BOX



Code:HAMD04

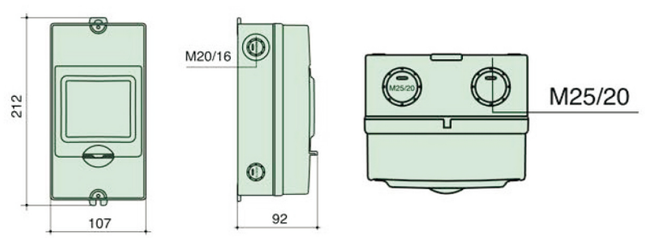



Code:HAMD06

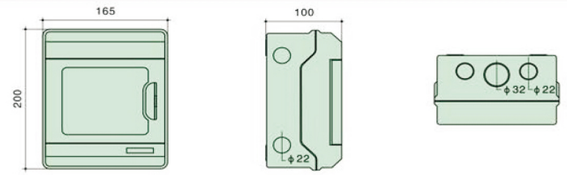



Code:HAMD08

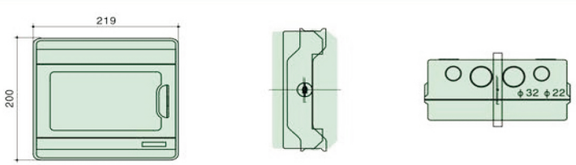



Code:HAMD12

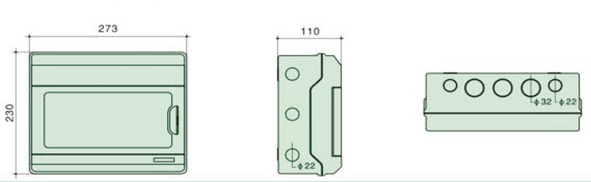



Code:HAMD18

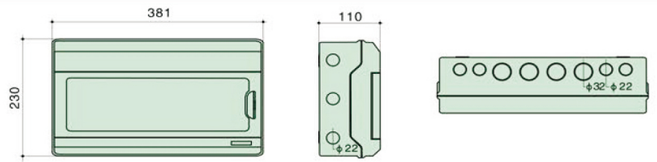



Code:HAMD24

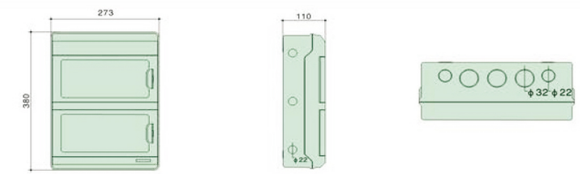



Code:HAMD36

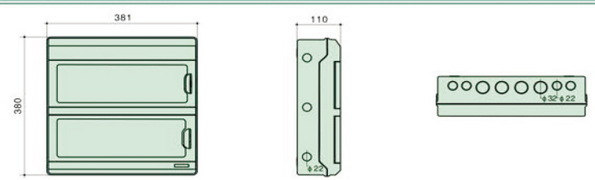

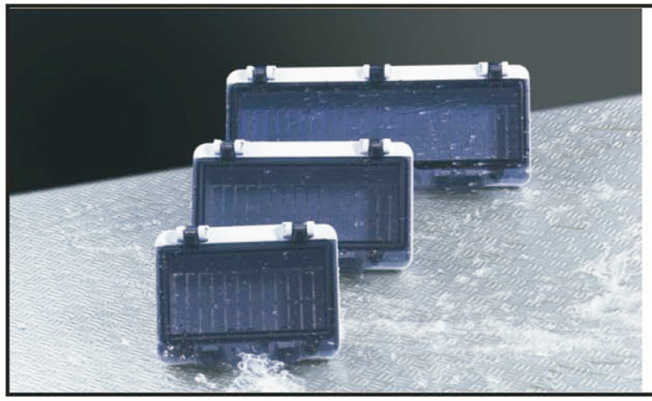



The base without protection is available

Transparent
contact protection window hood









Code:HANP02

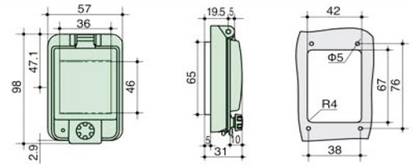



Code:HANP03

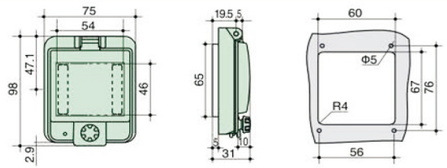



Code:HANP04

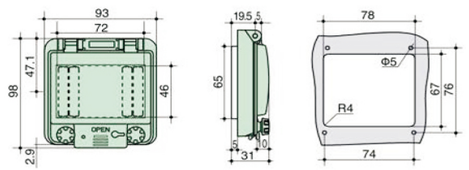



Code:HANP05

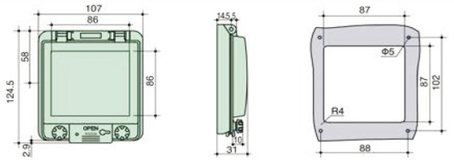



Code:HANP06

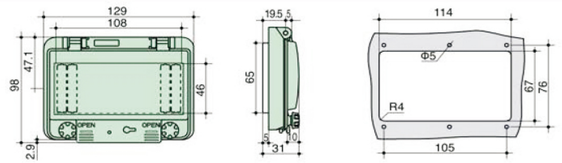



Code:HANP08

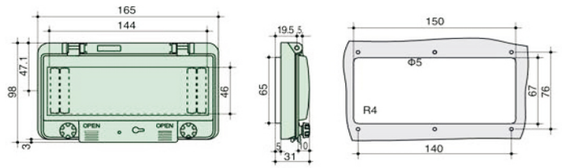



Code: HANP12

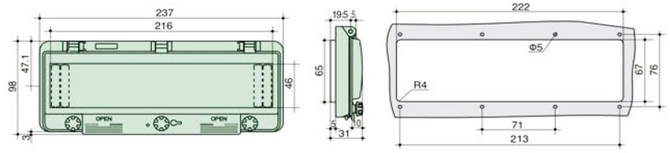



Code: HANP13

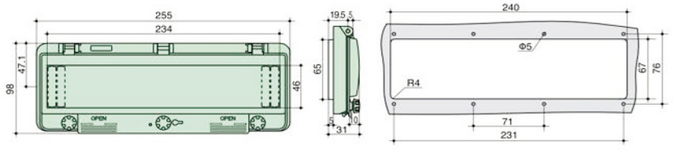



Code: HANP16

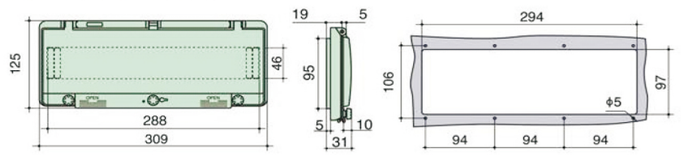



Code: HANB02

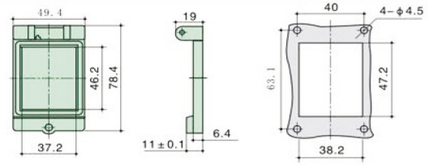



Code: HANB04

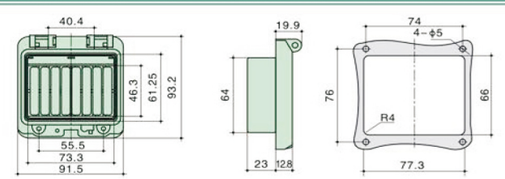



Code: HANB06

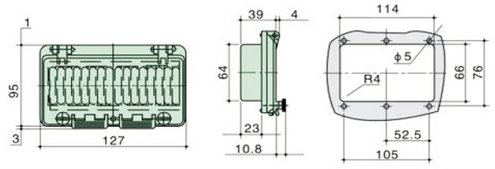

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI



Code: HANB02A

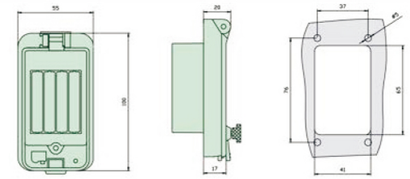



Code: HANPNB08

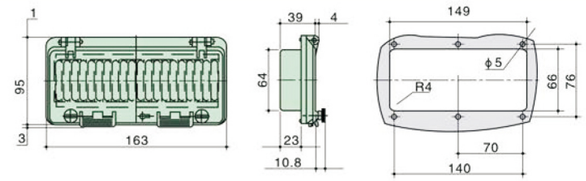



Code: HANB12

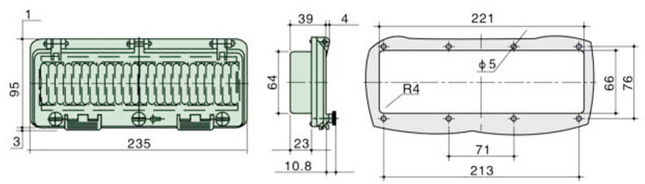



Code: HANB Transparent window of distribution box

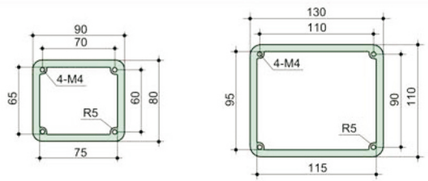

WATERPROOF ELECTRIC BOX





Code: HAFM04 Flush Mounted MCB Enclosure 4ways

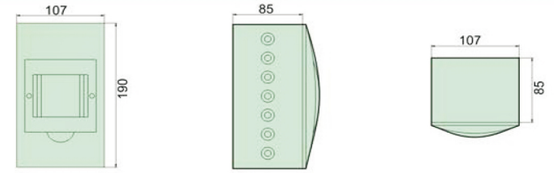



Code: HAFM06 Flush Mounted MCB Enclosure 6ways

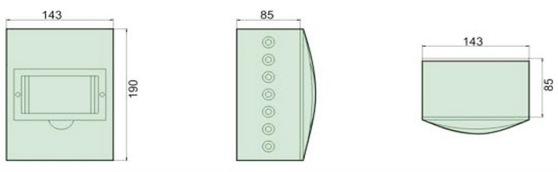



Code: HAFM08 Flush Mounted MCB Enclosure 8ways

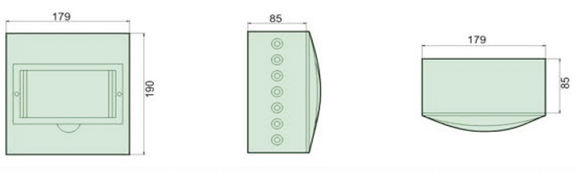



Code: HAFM12 Flush Mounted MCB Enclosure 12ways

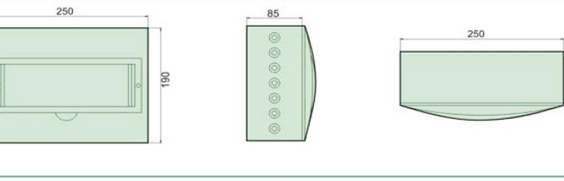



Code: HAFM15 Flush Mounted MCB Enclosure 15ways

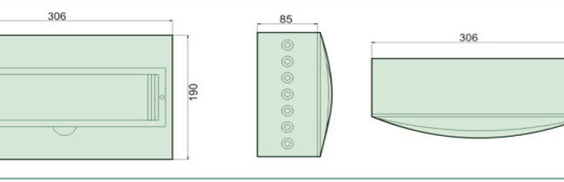



Code: HAFM18 Flush Mounted MCB Enclosure 18ways

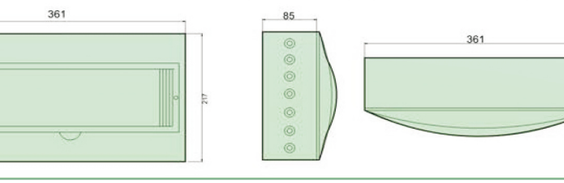



Code: HAFM24 Flush Mounted MCB Enclosure 24ways

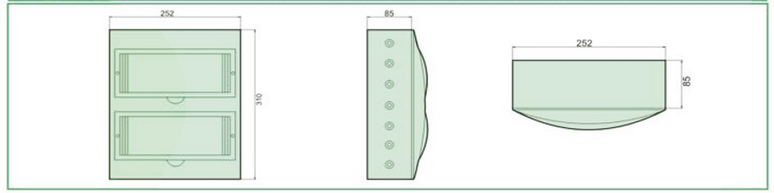



Code: HAFM36 Flush Mounted MCB Enclosure 36ways

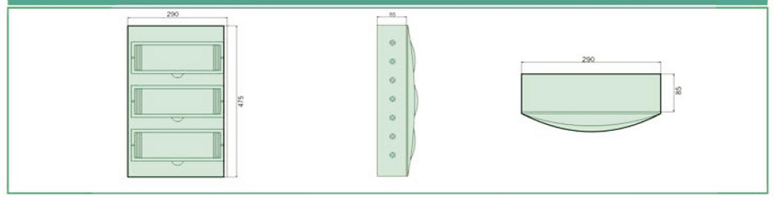



Code: HASM04 Surface Mounted MCB Enclosure 4ways

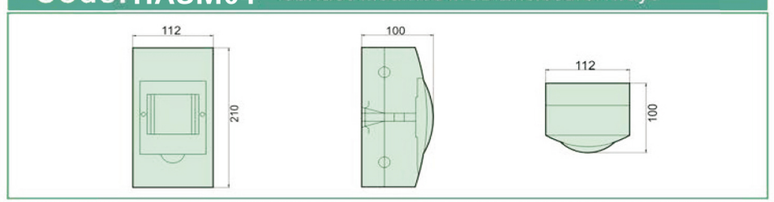



Code: HASM06 Surface Mounted MCB Enclosure 6ways

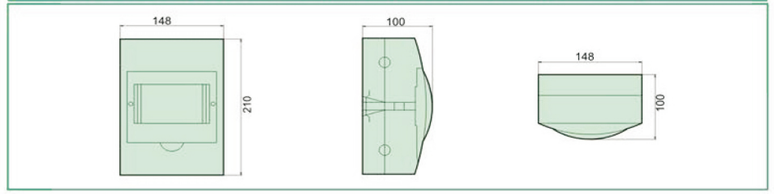



Code: HASM08 Surface Mounted MCB Enclosure 8ways

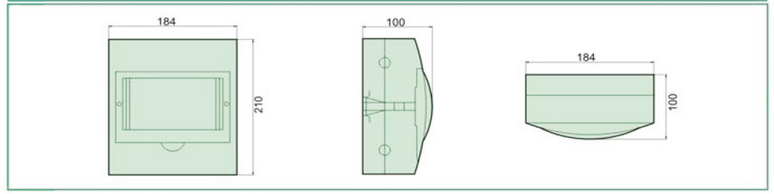



Code: HASM10 Surface Mounted MCB Enclosure 10ways

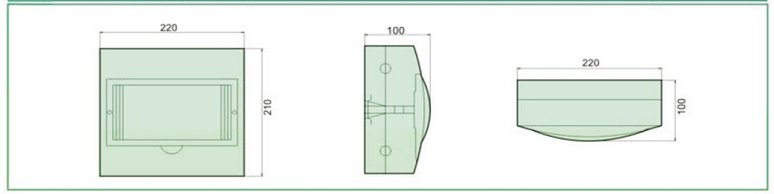

乐清市旋奇电器有限公司
YUEQING XUANQI ELECTRICAL CO.,LTD
XUAIVQI



Code: HASM12 Flush Mounted MCB Enclosure 12ways

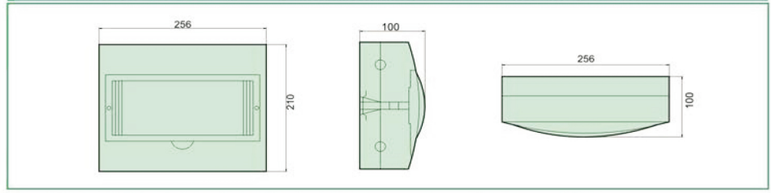



Code: HASM18 Flush Mounted MCB Enclosure 18ways

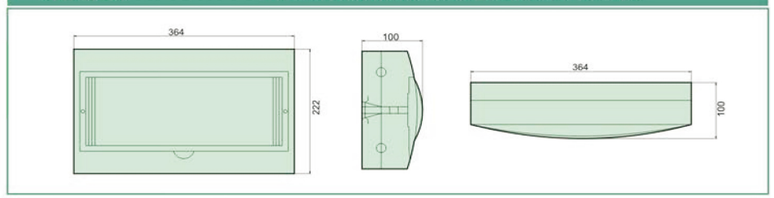



Code: HASM24 Surface Mounted MCB Enclosure 24ways

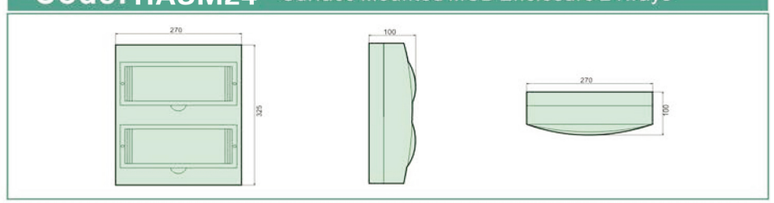



Code: HASM36 Surface Mounted MCB Enclosure 36ways

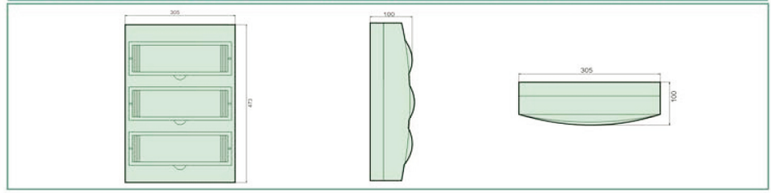



Code: HAMC01 Surface Mounted MCB Box 1way

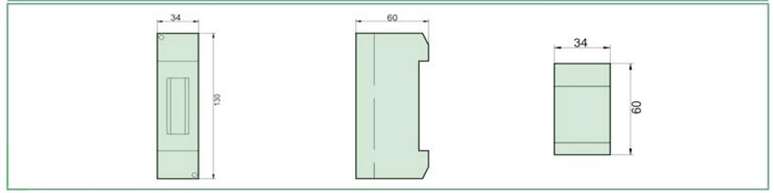



Code: HAMC02 Surface Mounted MCB Box 2ways

